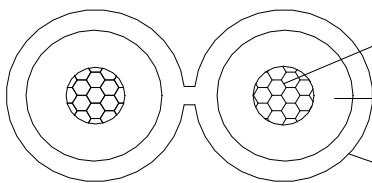


SPECIFICATION FOR APPROVAL

1.Construction		PV1-F 2x10mm ²		Revision:	A/0	Form No.	B274
Rated Voltage		1000VDC		CONSTRUCTION D.W.G			
Conductor	Cross-sectional Area(mm ²)	10		 <div style="display: flex; flex-direction: column; align-items: center; justify-content: center;"> <div style="margin-bottom: 5px;">Conductor</div> <div style="margin-bottom: 5px;">Inner Layer</div> <div>Outer Layer</div> </div>			
	Material	Stranded Tinned Copper					
	Cond.Size	84/ (0.40±0.008)					
	Stranded OD.(mm)	4.60					
Inner Layer	Material	XLPE					
	Color	Black ,Red					
Outer Layer	Material	XLPE					
	OD.(mm)	9.45±0.20x19.10±0.40					
	Color	Black					
2. Physical Properties							
Item		Specification		The marking content of one side is: (+) POLE WUXI XINHONGYE ▲ TÜV 2PFG 1169 PV1-F 10mm ² 0.9/1.8KVDC FOR DC USE ONLY – DO NOT DISCONNECT UNDER LOAD – 120°C SOLAR DC CABLE (+) POLE (This is to be printed on red core of figure 8 cable) (-) POLE WUXI XINHONGYE ▲ TÜV 2PFG 1169 PV1-F 10mm ² 0.9/1.8KVDC FOR DC USE ONLY – DO NOT DISCONNECT UNDER LOAD – 120°C SOLAR DC CABLE (-) POLE (This is to be printed on black core of figure 8 cable)			
		Inner Layer	Outer Layer				
Elongation	Un-aged	≥125%	≥125%				
Strength		≥6.5Mpa	≥8Mpa				
Cold bend test	(-40±2.0°C×16h)	No cracking					
Sunlight resistance	720h	Elongation and strength retention rate ≥80%					
Bending radius	≥4×Cable OD	PASS					
Ambient temperature		-40°C up to +90°C					
Content of halogen acid gas		IEC670754-1, EN50267-2-1					
Thermal endurance properties		> 25years					
Insulation resistance AT20°C		≥10 ¹⁴ Ω·cm					
Max. current AT60°C		98A					
Max.conductor temperature		120°C					
Flame test	IEC60332-1	PASS					
				5.Standard		TÜV 2PFG 1169/08.07 Reference number:T50389425	
				6.Packing		(a) 50m. (b) Consulting if delivering in other ways	
				WUXI XINHONGYE WIRE & CABLE CO., LTD. NO.17 Hexin Road,Xishan District,Wuxi,Jiangsu,China TEL:86-510-68780888 FAX:86-510-68780858 E-mail: sales@xhycable.com			
3.Electrical Properties				Part No.	SCTA10-01-018		APPROVED (CUSTOMER)
Item		SPECIFICATION		Serial No.	001		
Conductor Resistance AT 20°C		≤1.95Ω/km		Approved			
Dielectric-withstand test		6500VAC/5min		Checked			
Spark test		10000VAC		Drawing			
				Date	2014/12/11		