

电器配线

APPLIANCE WIRE

多芯聚氯乙烯护套线缆 MULTIPLE PVC INSULATED CABLE

UL 20276 LOW VOLTAGE COMPUTER CABLE

产品说明


- 额定温度：60℃, 80℃
- 额定电压：30V
- 参考标准：UL758, UL1581
- 导体使用单支或绞合 ≥ 40AWG 镀锡或裸铜
- PP/PE 绝缘, 符合 RoHS 环保标准
- PVC 护套, 符合 RoHS 环保标准
- 镀锡或裸铜编织屏蔽
- 通过 UL VW-1 阻燃测试
- 使用标准绝缘厚度、易裁线、易剥皮
- 用于电脑连接线

PRODUCT DESCRIPTION

- Rated temperature: 80℃
- Rated voltage: 30V
- Standard: UL758, UL1581
- Solid or stranded, tinned or bare copper conductor ≥ 40AWG
- PP/PE insulation, RoHS compliant.
- PVC jacket, RoHS compliant.
- Tinned or bare copper wire braid shield
- Passes UL VW-1 flame test
- Uniform insulation thickness to ensure easy stripping and cutting
- For computer wiring of appliance

产品结构图

CABLE CONSTRUCTION DIAGRAM

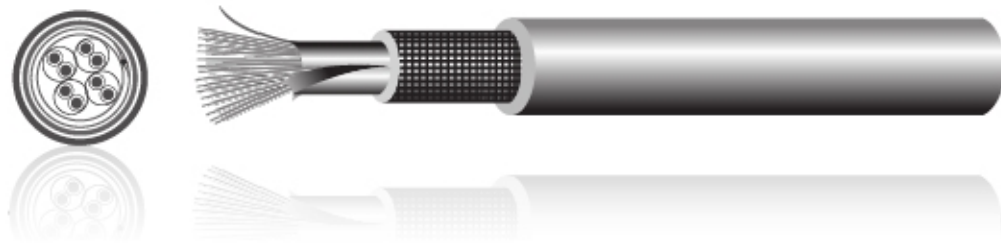

产品结构

CABLE CONSTRUCTION

导体 CONDUCTOR			绝缘 INSULATION		屏蔽 SHIELD	排流线 DRAIN	编织 BRAID	护套 JACKET		最大导体电阻 MAX. COND. RESISTANCE (Ω/km, 20°C, DC)	耐压强度 DIELECTRIC STRENGTH (VAC, 1min)	
规格 AWG	构造 CONSTRUCTION (No./mm)	外径 DIA. (mm)	芯数 (No.)	厚度 THICKNESS (mm)	外径 O.D. (mm)	构造 CONSTRUCTION (No./mm)	构造 CONSTRUCTION (No./mm)	厚度 THICKNESS (mm)	外径 O.D. (mm)			
30	7/0.10	0.30	3P	0.15	0.60	Al-mylar		16/5/0.10	0.61	3.70	381	1500
			6P	0.15	0.60	Al-mylar	7/0.100	16/6/0.10	0.61	4.50		1500
			9P	0.15	0.60	Al-mylar		16/7/0.10	0.64	5.20		1500
			15P	0.15	0.60	Al-mylar		24/6/0.10	0.64	6.20		1500
28	7/0.127	0.38	3P	0.16	0.70	Al-mylar		16/5/0.10	0.60	4.00	239	1500
			6P	0.16	0.70	Al-mylar	7/0.127	24/5/0.10	0.62	5.00		1500
			9P	0.16	0.70	Al-mylar		24/6/0.10	0.61	5.70		1500
			15P	0.16	0.70	Al-mylar		24/7/0.10	0.63	6.90		1500
26	7/0.16	0.48	3P	0.16	0.80	Al-mylar		16/6/0.10	0.63	4.40	150	1500
			6P	0.16	0.80	Al-mylar		24/6/0.10	0.64	5.50		1500
			9P	0.16	0.80	Al-mylar	7/0.16	24/7/0.10	0.62	6.30		1500
			15P	0.16	0.80	Al-mylar		24/8/0.10	0.61	7.60		1500

备注：详细尺寸以产品规格书为准

NOTE: The product's detailed description please refer to the specification for approval