

电器配线


APPLIANCE WIRE

多芯聚氯乙烯护套线缆 MULTIPLE PVC INSULATED CABLE

UL 20288 POWER SUPPLY CORD

产品结构图

CABLE CONSTRUCTION DIAGRAM

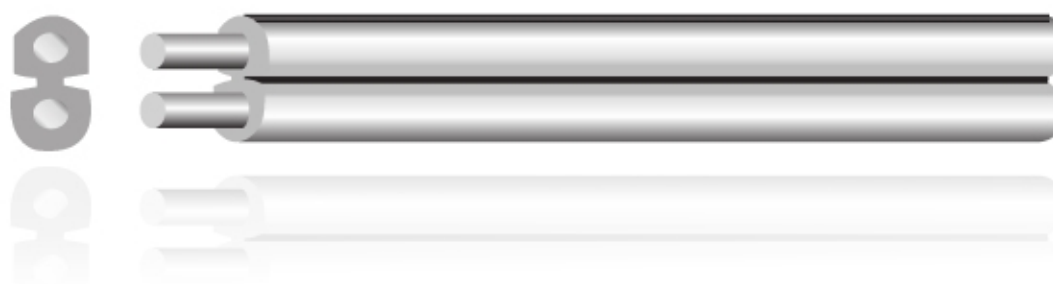

产品结构

CABLE CONSTRUCTION

导体 CONDUCTOR				绝缘 INSULATION		最大导体电阻 MAX. COND. RESISTANCE (Ω/km, 20°C, DC)	耐压强度 DIELECTRIC STRENGTH (VAC, 1min)
规格 AWG	构造 CONSTRUCTION (No. / mm)	外径 DIA. (mm)	芯数 (No.)	厚度 THICKNESS (mm)	外径 O.D. (mm)		

18	16/0.254	1.20	2	1.03	3.25×5.80	23.2	2000
----	----------	------	---	------	-----------	------	------

产品说明

- 额定温度：60℃, 75℃, 80℃, 90℃, 105℃
- 额定电压：300V
- 参考标准：UL758, UL1581
- 导体使用单支或绞合 18-12 AWG 镀锡或裸铜
- PVC 绝缘, 符合 RoHS 环保标准
- 通过 UL VW-1, CSA FT1 阻燃测试
- 使用标准绝缘厚度、易裁线、易剥皮
- 用于一般电子、电器电源连接线

PRODUCT DESCRIPTION

- Rated temperature: 60°C, 80°C, 90°C, 105°C
- Rated voltage: 300V
- Standard: UL758, UL1581
- Stranded, bare copper conductor 18-12AWG
- PVC insulation, RoHS compliant.
- Passes UL VW-1, CSA FT1 flame test
- Uniform insulation thickness to ensure easy stripping and cutting
- For general purpose use for power supply cord

备注：详细尺寸以产品规格书为准

NOTE: The product's detailed description please refer to the specification for approval